RFID Inlay - GB18R6-P

Applications


Automotive - Inventory Management - Supply Chain

Key Benefits

✓ Pre-Serialization of 96 bit EPC ✓ 3D Orientation Design


✓ Excellent Performance

✓ Flexible Memory




Technical Features

| Antenna Size / Web Width | 98 X 34 mm [3.86 X 1.34 in] / 110 mm [4.331 in] |
|------------------------------|--|
| Integrated Circuit (IC) Type | Impinj Monza R6-P |
| Operating Frequency | 860 - 960MHz |
| RF Communications Protocol | ISO/IEC 18000-63 and EPC Global Class 1 Gen2 |
| ARC Approved Spec | F, G, I, K, L, N, Q, W1, W2, W3, W4, W5, W6 |
| Chip Memory | 128 bits EPC + 32 bits User Memory |
| Inlay Substrate Material | PET |
| IC Features | Auto Adjust Technology, Brand Identifier, Pre-serialized 96bit EPC, Broad Bandwidth |
| Read Sensitivity | -20 dBm |
| Write Sensitivity | -16.7 dBm |
| Operating Temperature | -5°C to 60°C / 23°F to 140°F |
| Operating Humidity | 20% - 60% RH |



Sensitivity Results from Free Space (dBm)

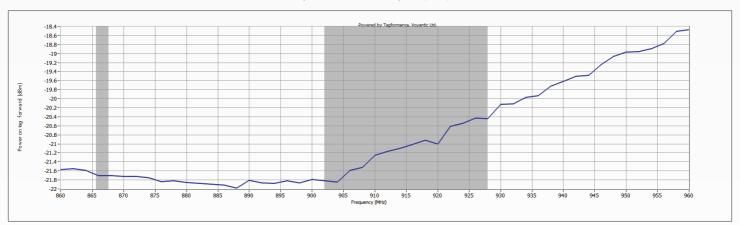

For more information, please contact us at sml.com/requestinfo.





This product should be tested by the customer / user thoroughly to ensure conformity to any particular requirements. We do not represent that this product is fit for any particular purpose or use. We reserve all rights to modify, supplement, substitute or discontinue product offerings at any time without notice. The information contained herein is for pure guidance but contains no representation concerning the accuracy or correctness of the data.