


RFID Inlay - GB25U8

Applications

Apparel - Baggage - Boxed Items - Denim - Footwear - Logistics
 Pallets - Polybags - Retail

Key Benefits


- ✓ Pre-Serialization of 96 bit EPC
- ✓ Excellent Performance
- ✓ Compact Antenna Size
- ✓ Robust Performance on Variety of Materials
- ✓ Global Frequency Coverage

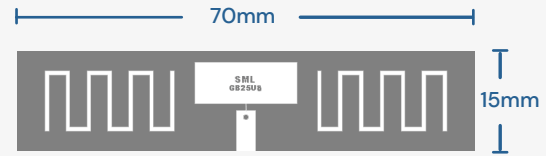


GB25U8

Technical Features

| | |
|------------------------------|---|
| Antenna Size / Web Width | 70 X 15 mm [2.76 X 0.59 in] / 76 mm [2.992 in] |
| Integrated Circuit (IC) Type | NXP UCODE 8 |
| Operating Frequency | 860 - 960MHz |
| RF Communications Protocol | ISO/IEC 18000-63 and EPC Global Class 1 Gen2 |
| ARC Approved Spec | F, I, H, K, M, N, Q, G, L, O, R, W1, W2, W3, W4, W5, W6, Y, J |
| Chip Memory | 128 bits EPC |
| Inlay Substrate Material | PET |
| IC Features | Auto Adjust Technology, Brand Identifier, Pre-serialized 96bit EPC, Broad Bandwidth |
| Read Sensitivity | -23 dBm |
| Write Sensitivity | -18 dBm |
| Operating Temperature | -5°C to 60°C / 23°F to 140°F |
| Operating Humidity | 20% - 60% RH |

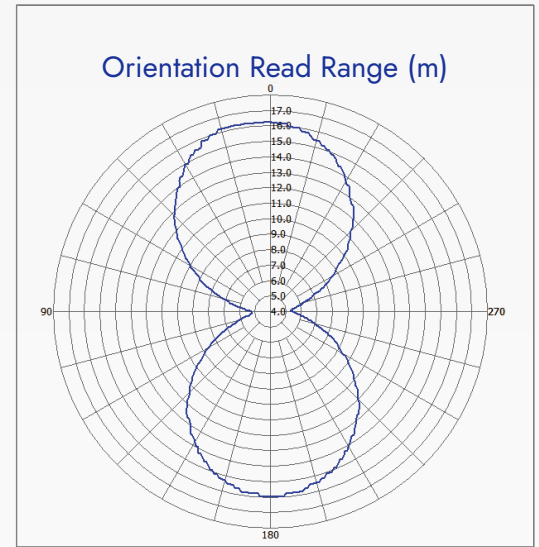

Sensitivity Results from Free Space (dBm)

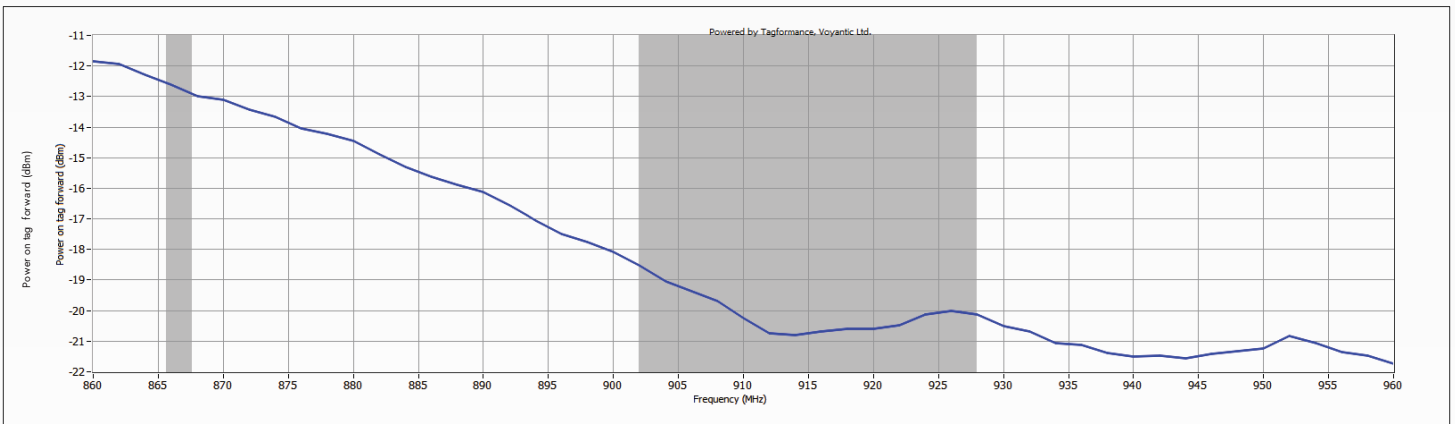

For more information, please contact us at sml.com/requestinfo.



This product should be tested by the customer / user thoroughly to ensure conformity to any particular requirements. We do not represent that this product is fit for any particular purpose or use. We reserve all rights to modify, supplement, substitute or discontinue product offerings at any time without notice. The information contained herein is for pure guidance but contains no representation concerning the accuracy or correctness of the data.